





Item	BD-1650V7EX	
Injection system	-	Multi Injection
Injection force	kN	638
Low injection speed	m/s	0.03 ~ 1.0
High injection speed	m/s	1.0 ~ 7.0
Injection position	mm	-350
Clamping force	kN	16500
Tie bar distance (H X W)	mm	1500 X 1300
Die stroke (Max. - Min.)	mm	1000
Die thickness (Max. - Min.)	mm	800~1600
Ejection force	kN	638
Machine dimensions (L x W x H)	mm	12535x3917x4352

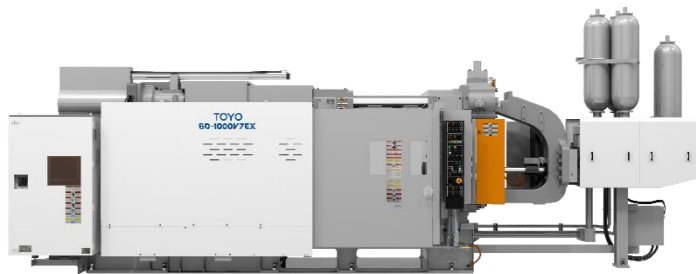

Item	BD-1000V7EX	
Injection system	-	Multi Injection
Injection force (with intens.ACC)	kN	552(391) - 686
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 8.0
Injection position	mm	-275
Clamping force	kN	10000
Tie bar distance (H x W)	mm	931 x 931
Die stroke (Max. - Min.)	mm	760
Die thickness	mm	950 - 400
Ejection force	kN	301.6
Machine dimensions (L x W x H)	mm	8622x2753x3360

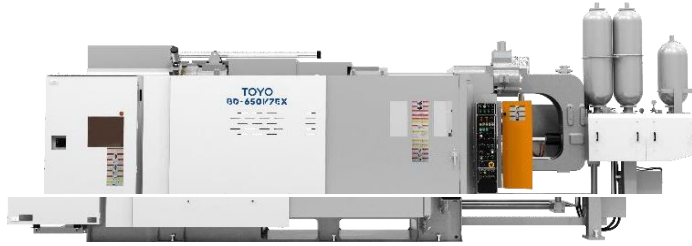

Item

BD-650V7EX

Injection system	-	Multi Injection
Injection force (with intens.ACC)	kN	423 (300) - 525
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 10.0
Injection position	mm	-225
Clamping force	kN	6500
Tie bar distance (H x W)	mm	850 x 850
Die stroke (Max. - Min.)	mm	660
Die thickness	mm	900 - 350
Ejection force	kN	259.8
Machine dimensions (L x W x H)	mm	7830 x 2495 x 2972



Item

BD-350V7EX

Injection system	-	Multi Injection
Injection force (with intens.ACC)	kN	270 (191) - 335
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 11.0
Injection position	mm	-150
Clamping force	kN	3500
Tie bar distance (H x W)	mm	652 x 652
Die stroke (Max. - Min.)	mm	420 - 300
Die thickness	mm	700 - 300
Ejection force	kN	194
Machine dimensions (L x W x H)	mm	6185 x 2019 x 2786



Item

BD-200V7EX(-H)

Injection system	-	Multi Injection
Injection force (with intens.ACC)	kN	177 (126) - 219
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 11.0
Injection position	mm	-125
Clamping force	kN	2000
Tie bar distance (H x W)	mm	508 x 530
Die stroke (Max. - Min.)	mm	350 - 200
Die thickness	mm	600 - 250
Ejection force	kN	104.8
Machine dimensions (L x W x H)	mm	5407 x 1796 x 2545



Item

Ds-500EX

Injection system	-	Motor-driven servo +
Clamping force	kN	5000
Tie bar distance (HxW)	mm	748 x 748
Die stroke (Max. Min.)	mm	560~400
Die thickness	mm	850~350
Injection force	kN	486
Injection position	mm	-175
Low injection speed (maximum 9 point setting)	m/s	0.01~0.5
High injection speed (maximum 5 point setting)	m/s	0.5~8.0
Ejection force	kN	251
Machine dimensions (L x W x H)	mm	8088 x 2245 x 3293



Item

Ds-250EX

Injection system	-	Motor-driven servo +
Clamping force	kN	2500
Tie bar distance (HxW)	mm	584 x 584
Die stroke (Max. Min.)	mm	380~250
Die thickness	mm	600~250
Injection force	kN	282
Injection position	mm	-125
Low injection speed (maximum 9 point setting)	m/s	0.01~0.5
High injection speed (maximum 5 point setting)	m/s	0.5~8.0
Ejection force	kN	125
Machine dimensions (L x W x H)	mm	5831 x 1851 x 2644



Item

DsF-125

Injection system	-	Motor-driven servo
Injection force	kN	143
Low injection speed (maximum 9 point setting)	m/s	0.01~1.0
High injection speed (maximum 5 point setting)	m/s	0.5~3.0
Injection position	mm	-100
Clamping force	kN	1250
Tie bar distance (H x W)	mm	460 x 460
Die thickness (Max. Min)	mm	350~200
Die thickness (Max. Min)	mm	500~250
Ejection force	kN	80
Machine dimensions (L x W x H)	mm	4755 x 1404 x 1715



Item

BD-80V6 EX

Injection system	-	Multi Injection System
Injection force	kN	50.9 - 82.7
Low injection speed (maximum 9 point setting)	m/s	0.03 - 1.0
High injection speed (maximum 5 point setting)	m/s	1.0 - 9.0
Injection position	mm	-85
Clamping force	kN	800
Tie bar distance (H x W)	mm	400 x 400
Die stroke (Max. Min.)	mm	300 - 200
Die thickness (Max. Min.)	mm	450 - 200
Ejection force	kN	52
Machine dimensions (L x W x H)	mm	3898 x 1505 x 2115



Item

BD-350VC EX

Injection system	-	Booster cylinder
Injection force	kN	264~335
Low injection speed (maximum 9 point setting)	m/s	0.1~0.7
High injection speed	m/s	1.0~5.0
Injection position	mm	-150
Clamping force	kN	3500
Tie bar distance (H x W)	mm	352 x 652
Die stroke (Max. Min.)	mm	120~300
Die thickness (Max. Min.)	mm	700~300
Ejection force	kN	193
Machine dimensions (L x W x H)	mm	6175 x 2021 x 2821



Item

BD-1250V7EX

Injection sytem	-	Multi Injection System
Injection force	kN	580 - 1018
Low injection speed	m/s	0.05 - 0.7
High injection speed	m/s	1.0 - 8.0
Injection position	mm	-350
Clamping force	kN	12500
Tie bar distance (H X W)	mm	1150 X 1150
Die stroke (Max. - Min.)	mm	900
Die thickness (Max. - Min.)	mm	1500 - 600
Ejection force	kN	517.2
Machine dimensions (L x W x H)	mm	13003x3273x4538



Item

BD-800V7EX

Injection system	-	Multi Injection System
Injection force (with intens.ACC)	kN	485(344) - 603
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 10.0
Injection position	mm	-275
Clamping force	kN	8000
Tie bar distance (H x W)	mm	931 x 931
Die stroke (Max. - Min.)	mm	760
Die thickness	mm	950 - 400
Ejection force	kN	301.6
Machine dimensions (L x W x H)	mm	8622x2753x3360



Item

BD-500V7EX

Injection system	-	Multi Injection System
Injection force (with intens.ACC)	kN	395 (280) - 491
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 10.0
Injection position	mm	-175
Clamping force	kN	5000
Tie bar distance (H x W)	mm	751 x 751
Die stroke (Max. - Min.)	mm	560
Die thickness	mm	850 - 350
Ejection force	kN	221.7
Machine dimensions (L x W x H)	mm	7386 x 2416 x 2945



Item

BD-250V7EX


Injection system	-	Multi Injection System
Injection force (with intens.ACC)	kN	227 (161) - 281
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 11.0
Injection position	mm	-125
Clamping force	kN	2500
Tie bar distance (H x W)	mm	584 x 584
Die stroke (Max. - Min.)	mm	380 - 250
Die thickness	mm	600 - 250
Ejection force	kN	123.8
Machine dimensions (L x W x H)	mm	5603 x 1947 x 2601



Item

BD-125V7EX

Injection system	-	Multi Injection System
Injection force (with intens.ACC)	kN	143 - 177
Low injection speed	m/s	0.01 - 1.0
High injection speed	m/s	1.0 - 11.0
Injection position	mm	-100
Clamping force	kN	1250
Tie bar distance (H x W)	mm	460 x 460
Die stroke (Max. - Min.)	mm	350 - 200
Die thickness	mm	500 - 250
Ejection force	kN	80.5
Machine dimensions (L x W x H)	mm	4585 x 1575 x 2206.5

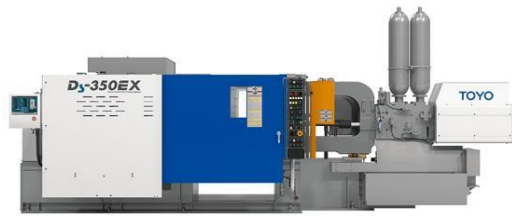

Item

Ds-350EX

Injection system	-	Motor-driven servo + Hydraulic pressure
Clamping force	kN	3500
Tie bar distance (HxW)	mm	652 x 652
Die stroke (Max. Min.)	mm	420~300
Die thickness	mm	700~300
Injection force	kN	335
Injection position	mm	-150
Low injection speed (maximum 9 point setting)	m/s	0.01~0.5
High injection speed (maximum 5 point setting)	m/s	0.5~8.0
Ejection force	kN	190
Machine dimensions (L x W x H)	mm	6464 x 1936 x 2857



Item

Ds-125EX

Injection system	-	Motor-driven servo + Hydraulic pressure
Clamping force	kN	1250
Tie bar distance (HxW)	mm	460 x 460
Die stroke (Max. Min.)	mm	350~200
Die thickness	mm	500~250
Injection force	kN	177
Injection position	mm	-100
Low injection speed (maximum 9 point setting)	m/s	0.01~0.5
High injection speed (maximum 5 point setting)	m/s	0.5~8.0
Ejection force	kN	80
Machine dimensions (L x W x H)	mm	4460 x 1404 x 2070



Item

BD-500VC EX

Injection system	-	Multi Injection System
Injection force	kN	383~491
Low injection speed (maximum 9 poin	m/s	0.03~1.0
High injection speed	m/s	1.0 - 9.0
Injection position	mm	75 (center shot is not availab
Clamping force	kN	5000
Tie bar distance (H x W)	mm	751 x 751
Die stroke (Max. Min.)	mm	560
Die thickness (Max. Min)	mm	850~350
Ejection force	kN	254.4
Machine dimensions (L x W x H)	mm	7651 X 2595 X 2934